

Truck with **HARDOX**[®] half-pipe body



Keep things moving forward.





Hydr. tailgate with large opening

Top-hinged hydraulic tailgate with lock-out feature



Keep things moving forward



Cab protector

Spare-wheel bracket



Tailgate with




Lock-out valve for hydraulic tailgate



Asphalt-spreader-compatible hinged underride guard



Rubber front body support

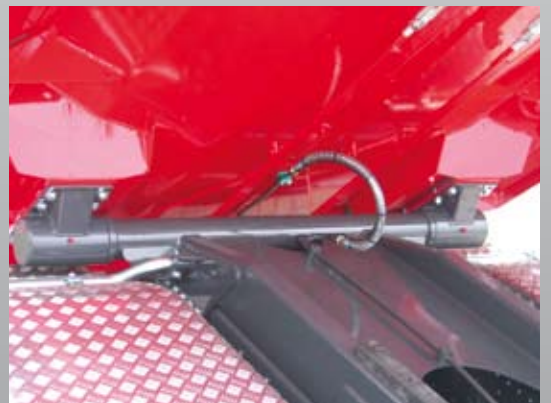

Wide-spaced rear body supports

CARNEHL



Access ladder



Lateral protection panels



Aluminium checkered panels and lateral underride guard

Vehicle specifications

		Internal tailgate	
Cab	Wheelbase	Inner loading length	Capacity at 1,460 mm loading height
Daimler			
short	4.200 mm	5.150 mm	16 m ³
medium long	4.200 mm	5.000 mm	15,5 m ³
short	4.500 mm	5.450 mm	17 m ³
medium long	4.500 mm	5.200 mm	16 m ³
MAN			
medium	2.505 mm	5.450 mm	17 m ³
long	2.505 mm	5.250 mm	16 m ³
medium	2.980 mm	5.850 mm	18 m ³
long	2.980 mm	5.650 mm	17,5 m ³
VOLVO			
L1EH1	4.300 mm	5.450 mm	17 m ³
L1EH1	4.600 mm	5.850 mm	18 m ³
L2EH1	5.100 mm	6.100 mm	19 m ³
SCANIA			
CR/P14	4.300 mm	5.450 mm	17 m ³
CR/P19	4.300 mm		
CR/P14	4.500 mm	5.650 mm	17,5 m ³
CR/P19	4.500 mm		
IVECO			
short	5.050 mm	5.350 mm	16,5 m ³
short	5.300 mm	5.650 mm	17,5 m ³
DAF			
short	5.050 mm	5.350 mm	16,5 m ³
short	5.300 mm	5.650 mm	17,5 m ³
Renault			
medium long	4.550 mm	5.450 mm	17 m ³

Keep things moving forward.